



See every bit, byte, and packet™


PT100

Portable Breakout TAP for 10/100 Megabit Networks

PT100 At a Glance:


- 100% Passive
- 10/100M TAP
- Copper Network and Monitoring Ports
- Breakout TAP Mode
- Easy Configuration Switches on Back
- Small Portable Form Factor
- Rack Mount 4 TAPs in a 1U Plate
- Passes Physical Errors
- 100% Secure and invisible no IP Address & No MAC Address

A Portable Solution

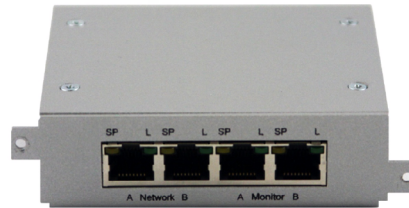


The portable network TAP is ideal for 10/100M copper network monitoring and troubleshooting. The innovative design allows this TAP to easily install into any copper 10/100M network segment. Once installed, the PT100 will enable you to monitor, troubleshoot, or analyze your network segments without dropping any packets. The PT100 offers an easy-to-deploy network access solution.

Traffic and Mounting Illustrations

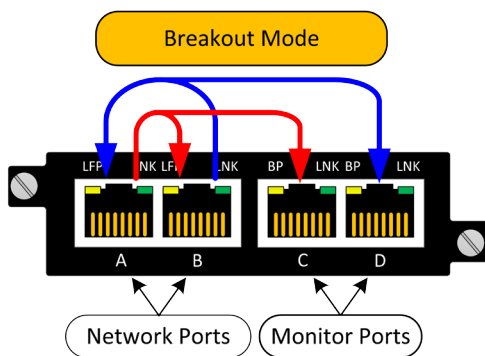

Monitor your traffic in both directions with our easy-to-use, plug-n-play PT100 Breakout TAP.

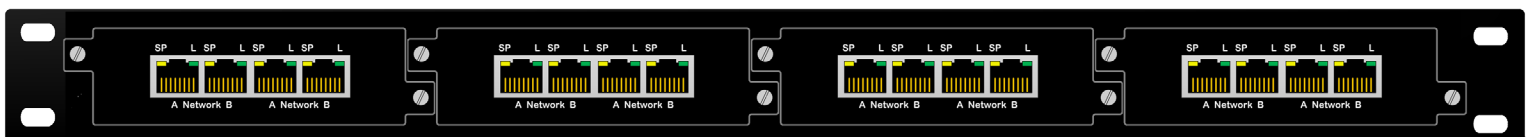

The RMP-1U Rackmount Plate holds all PT100, P1GCCB, P1GxxA and P1GxxBP TAPs securely for a high-density solution. Our RMP-1U measures 19.0"W x 1.7"H x 9.1"D



PT100

Garlandtechnology.com

Have Questions?

- Email sales@garlandtechnology.com
- Call +1 716.242.8500
- Visit garlandtechnology.com

Technical Details

Network Ports:	2 Copper RJ-45	Ambient Temp.:	0C to +40C / +32F to +104F
Monitor Ports:	2 Copper RJ-45	Operating Rel. Humidity:	90% non-condensing
Network Port Speed:	10/100M	Storage Temp.:	-20C to +70C / -4F to +158F
Monitor Port Speed:	10/100M	Voltage (AC/DC):	6 Volts
Size (WxHxD):	3.9" x 1.15" x 6.5"	Current (nominal):	1.4 amps
Weight:	0.6 lbs	Maximum Consumption:	8.5 watts

Product Details

Model #	Media			Modes			Network Speed
	Network	Monitor	Breakout	Aggregating	Regenerating/SPAN	Bypass	
PT100	Copper	Copper	✓				10/100M

Ordering Information

Model #	Description
PT100	Portable 10/100M Passive Copper Breakout TAP
RMP-1U	1U Rack Mount Plate - holds up to 4 PT100, P1GCCB, P1GxxA, or P1GxxBP TAPs



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains.

Copyright 2014 © Garland Technology LLC. All Rights Reserved